


YK 系列安装尺寸表(6000V、10000V IP44 水冷)

YK MOUNTING DIMENSIONS TABLE(6000V、10000V IP44 WATER COOLING)

型号 Type	功率 Power kW	电压 Voltage kV	H	H1	H2	H3	H4	E	C	L	L5	L7	L8	B	b5	A1	a2	K	F	G	G2	D	重量 Weight kg
YK1000-2/990	1000	6	630	2250	130	500	310	160	200	2900	2600	850	820	2180	1400	1200	1910	42	32	109		120	9800
YK1250-2/990	1250	6	630	2250	130	500	310	160	200	2960	2700	900	820	2240	1400	1200	1910	42	32	109		120	10200
YK1600-2/990	1600	6	630	2250	130	500	310	160	200	2960	2700	900	820	2260	1400	1200	1910	42	32	109		120	10700
YK1800-2/990	1800	6	630	2250	130	500	360	160	200	3060	2800	900	820	2320	1400	1200	1910	42	32	109		120	11200
YK2000-2/990	2000	6	630	2250	130	500	360	160	200	3060	2800	900	820	2400	1400	1200	1910	42	32	109		120	11800
YK2240-2/990	2240	6	630	2250	130	500	360	160	200	3180	2800	900	820	2400	1400	1200	1910	42	32	109		120	12300
YK2500-2/990	2500	6	750	1980	250	500	400	190	232	3344	2850	960	975	2500	1750	1600	2540	48	32		138	160	13100
YK2800-2/990	2800	6	750	1980	250	500	400	190	232	3344	2850	960	975	2500	1750	1600	2540	48	32		138	160	13700
YK3200-2/1180	3200	6	750	2200	250	500	440	190	232	3644	3150	960	1000	2800	1750	1600	2800	48	32		138	160	14800
YK4000-2/1180	4000	6	750	2400	250	500	440	190	265	3710	3100	960	1000	2800	1750	1600	2800	56	32		158	180	16500
YK1000-2/990	1000	10	630	2250	130	500	310	160	200	2860	2600	800	803	2140	1400	1200	1800	42	32	109		120	10200
YK1250-2/990	1250	10	630	2250	130	500	310	160	200	2960	2700	900	820	2240	1400	1200	1910	42	32	109		120	11000
YK1600-2/990	1600	10	750	2250	250	500	310	190	232	3350	2850	940	820	2500	1400	1200	1910	42	32	149		160	11500
YK1800-2/990	1800	10	750	2250	250	500	310	190	232	3350	2850	940	820	2500	1400	1200	1910	42	32	149		160	12100
YK2000-2/990	2000	10	750	2250	250	500	310	190	232	3350	2850	940	820	2500	1400	1200	1910	42	32	149		160	12800
YK2240-2/1180	2240	10	750	2284	250	500	420	190	232	3344	2770	960	1005	2500	1770	1600	2620	48	32		138	160	13500
YK2500-2/1180	2500	10	750	2284	250	500	420	190	232	3344	2770	1020	1005	2500	1770	1600	2620	48	32		138	160	14100
YK2800-2/1180	2800	10	750	2284	250	500	420	190	232	3524	2950	1060	1005	2680	1770	1600	2620	48	32		138	160	14600
YK3200-2/1180	3200	10	750	2284	250	500	420	190	232	3524	2950	1060	1005	2680	1770	1600	2620	48	32		138	160	15100
YK3550-2/1180	3550	10	750	2284	250	500	420	190	232	3524	2950	1100	1005	2680	1770	1600	2620	48	32		138	160	15800
YK4000-2/1430	4000	10	800	2724	300	500	480	210	210	3500	3020	1320	1100	2590	2200	1920	2946	56	32		137	180	20100
YK5000-2/1430	5000	10	800	2724	300	500	480	210	210	3670	3190	1430	1100	2760	2200	1920	2946	56	32		137	180	22180
YK6300-2/1430	6300	10	800	2724	300	500	480	210	210	3920	3440	1680	1100	3010	2200	1920	2946	56	32		137	180	238200

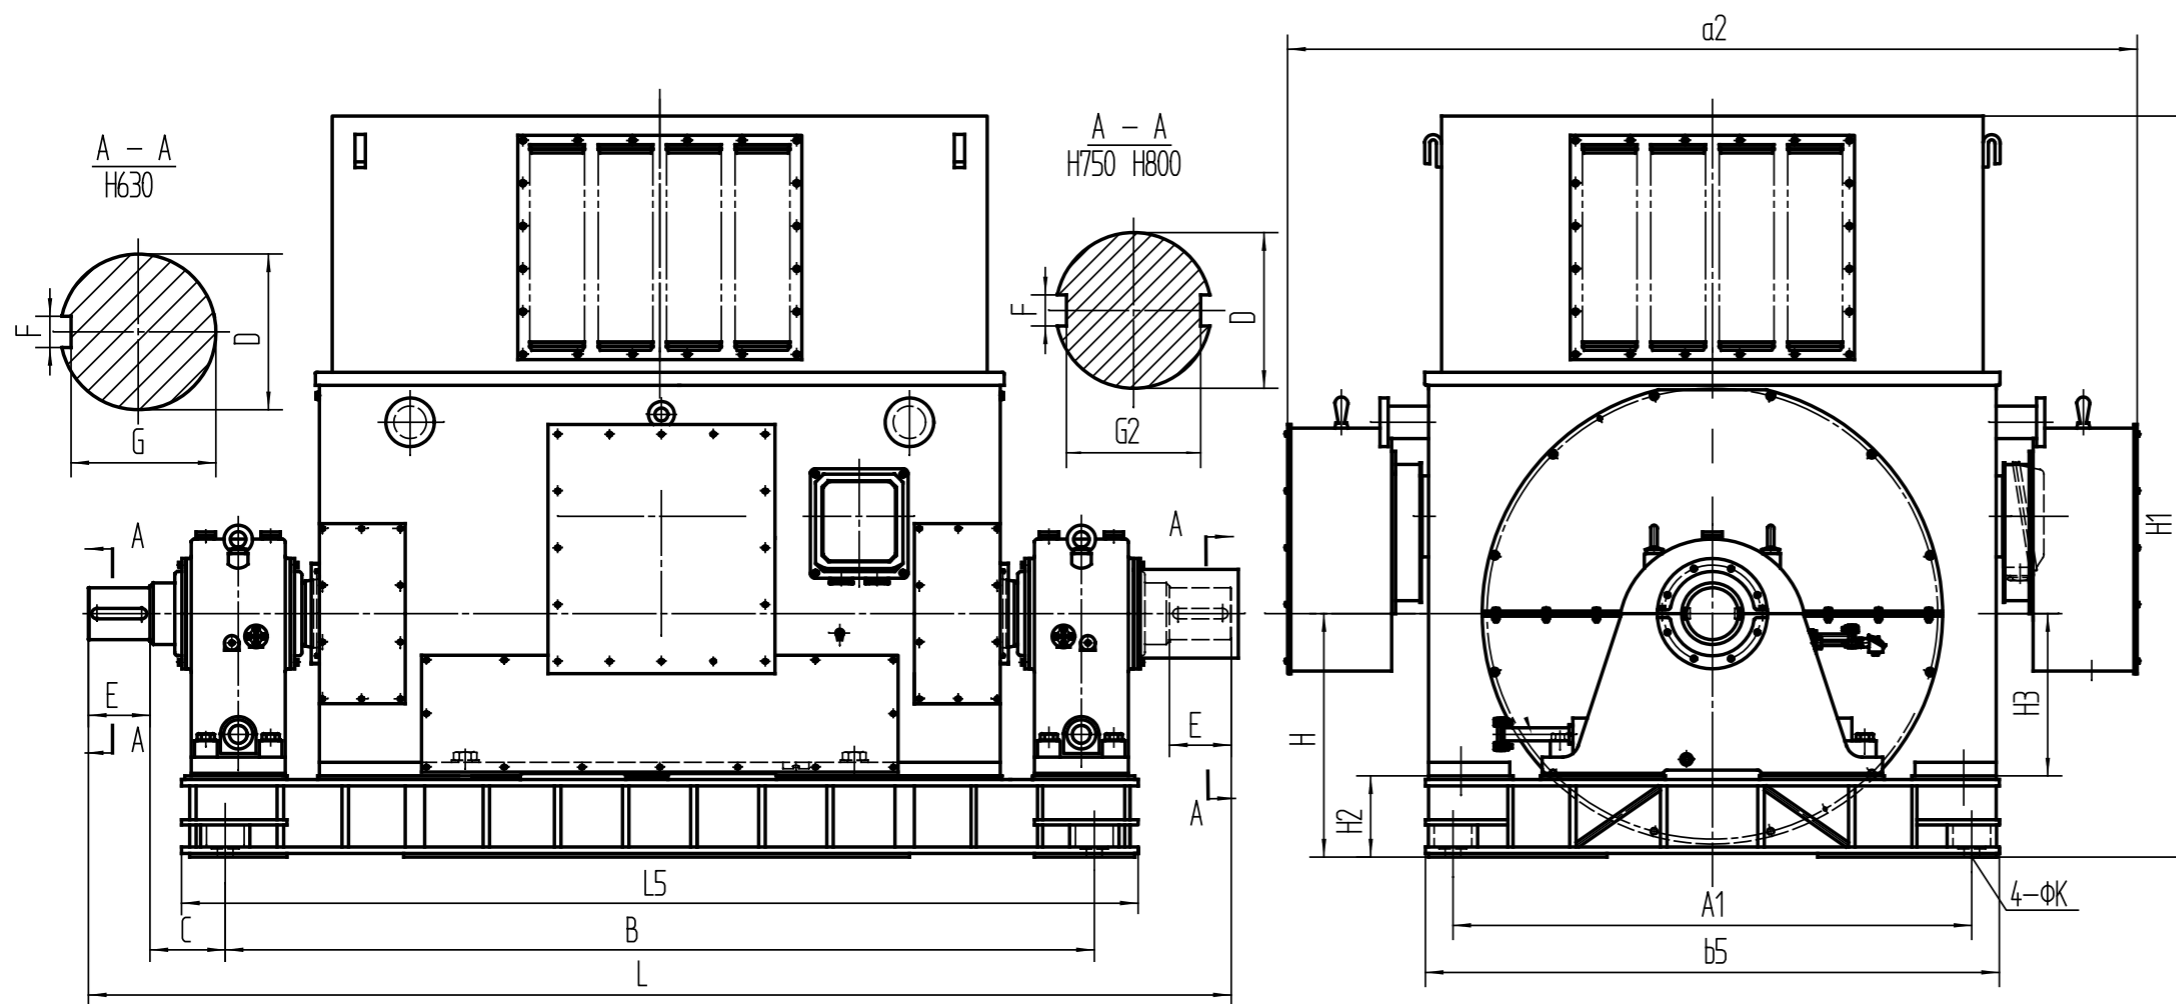

YK 系列安装尺寸表(6000V、10000V IP23)

YK MOUNTING DIMENSIONS TABLE(6000V、10000V IP23)

型号 Type	功率 Power kW	电压 Voltage kV	H	H1	H2	H3	E	C	L	L5	B	b5	A1	a2	K	F	G	G2	D	重量 Weight kg
YK1000-2/990	1000	6	630	2250	130	500	160	200	2900	2600	2180	1400	1200	1910	42	32	109		120	9400
YK1250-2/990	1250	6	630	2250	130	500	160	200	2960	2700	2240	1400	1200	1910	42	32	109		120	9800
YK1600-2/990	1600	6	630	2250	130	500	160	200	2960	2700	2260	1400	1200	1910	42	32	109		120	10300
YK1800-2/990	1800	6	630	2250	130	500	160	200	3060	2800	2320	1400	1200	1910	42	32	109		120	10800
YK2000-2/990	2000	6	630	2250	130	500	160	200	3060	2800	2400	1400	1200	1910	42	32	109		120	11200
YK2240-2/990	2240	6	630	2250	130	500	160	200	3180	2800	2400	1400	1200	1910	42	32	109		120	11800
YK2500-2/990	2500	6	750	1980	250	500	190	232	3344	2850	2500	1750	1600	2540	48	32		138	160	12600
YK2800-2/990	2800	6	750	1980	250	500	190	232	3344	2850	2500	1750	1600	2540	48	32		138	160	13200
YK3200-2/1180	3200	6	750	2200	250	500	190	232	3644	3150	2800	1750	1600	2800	48	32		138	160	14200
YK4000-2/1180	4000	6	750	2400	250	500	190	265	3710	3100	2800	1750	1600	2800	56	32		158	180	15800
YK1000-2/990	1000	10	630	2250	130	500	160	200	2860	2600	2140	1400	1200	1800	42	32	109		120	9800
YK1250-2/990	1250	10	630	2250	130	500	160	200	2960	2700	2240	1400	1200	1910	42	32	109		120	10400
YK1600-2/990	1600	10	750	2250	250	500	190	232	3350	2850	2500	1400	1200	1910	42	32	149		160	10800
YK1800-2/990	1800	10	750	2250	250	500	190	232	3350	2850	2500	1400	1200	1910	42	32	149		160	11600
YK2000-2/990	2000	10	750	2250	250	500	190	232	3350	2850	2500	1400	1200	1910	42	32	149		160	12200
YK2240-2/1180	2240	10	750	2284	250	500	190	232	3344	2770	2500	1770	1600	2620	48	32		138	160	12900
YK2500-2/1180	2500	10	750	2284	250	500	190	232	3344	2770	2500	1770	1600	2620	48	32		138	160	13600
YK2800-2/1180	2800	10	750	2284	250	500	190	232	3524	2950	2680	1770	1600	2620	48	32		138	160	14100

YK3200-2/1180	3200	10	750	2284	250	500	190	232	3524	2950	2680	1770	1600	2620	48	32		138	160	14600
YK3550-2/1180	3550	10	750	2284	250	500	190	232	3524	2950	2680	1770	1600	2620	48	32		138	160	15200
YK4000-2/1430	4000	10	800	2724	300	500	210	210	3500	3020	2590	2200	1920	2946	56	32		137	180	19800
YK5000-2/1430	5000	10	800	2724	300	500	210	210	3670	3190	2760	2200	1920	2946	56	32		137	180	21680
YK6300-2/1430	6300	10	800	2724	300	500	210	210	3920	3440	3010	2200	1920	2946	56	32		137	180	23200